

















1000 iQ

BOFA's AD 1000 iQ high end laser extraction system combines extremely large filter capacity with high airflow and pressure rates, making it the ideal choice for heavy duty applications that generate large amounts of particulate and gaseous organic compounds.

Performance has been further enhanced with the inclusion of several features including BOFA's acclaimed iQ Operating System, making the AD 1000 iQ one of the most advanced systems available.

The iQ system takes performance and safety parameters to a new level and ensures that maintenance, downtime and ownership costs are kept to a minimum.

performance laser fume extraction system for applications in the laser marking, coding and engraving industries.

Affordable high




STANDARD FFATURES:

- iQ Operating System
- High airflow and pressure rates
- Reverse Flow Air filter technology
- DeepPleat DUO pre filter
- Combined HEPA/Gas filter incorporating ACF technology
- Automatic flow control system
- Real time airflow reading
- Independent filter condition monitoring, display and warnings
- High contrast display
- 'Run safe' operation
- Remote diagnostics via USB
- Filters with long life and low replacement cost

OPTIONAL FEATURES:

- VOC gas sensor (Volatile Organic Compound)
- Remote stop / start interface
- Filter change / System fail signal
- Interfacing with host laser
- On-board compressor
- Optional filter medias

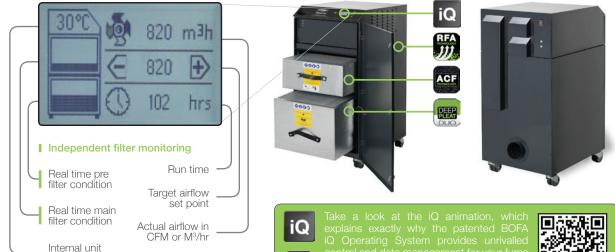

temperature

Patented Technology - Patent No: GB2 499 812

UNITS - PART NUMBERS			OPTIONS			
Model	Voltage	Part No.	24V Stop / Start	Filter change / System failure signal	VOC Monitoring	On-board Compressor
AD 1000 iQ	230V	L0772	A2001	A2002	A2003	A2007
Stainless Steel	115V	L0771				
AD 1000 iQ	230V	L0762				
Powder Coated	115V	L0761				

REPLACEMENT FILTERS - PART NUMBERS		
Model	DeepPleat DUO Pre Filter	Combined HEPA/Gas Filter
AD 1000 iQ	A1030222	A1030297

TECHNICAL DATA			
	230V	115V	
Dimensions (HxWxD)	1197 x 600 x 790mm	47.1 x 23.6 x 31.1"	
Cabinet Construction Brushed stainless steel / Powder coated mild steel		Brushed stainless steel / Powder coated mild steel	
Airflow / Pressure	850m ³ /hr / 100mbar	500cfm / 100mbar	
Electrical Data	230v 1ph 50/60Hz Full load current: 12.8 amps / 2.2kw	115v 60/50Hz Full load current: 19.5 amps / 2.2kw	
Noise Level	< 61dBA*	< 61dBA*	
Weight	140kgs	309lbs	
Approvals CE		CE	

DEEPPLEAT DUO PRE FILTER SPECIFICATIONS		
Surface Media Area	30m² approx	
Filter Media	Glass Fibre	
Filter Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec mild steel	
Filter Efficiency	F8 (95% @ 0.9 microns)	

COMBINED HEPA/GAS FILTER SPECIFICATIONS		
Surface Media Area	7.5m² approx	
HEPA Filter Media	Glass Fibre	
HEPA Media Construction	Maxi Pleat Construction with Webbing Spacers	
Filter Housing	Zintec Mild Steel	
Treated Activated Carbon	34kgs	
Filter Efficiency	99.997% @ 0.3 microns	

AIRFLOW THROUGH FILTERS



Chemical Filter



HEPA Filter



Pre Filter



Clean Air



Contaminated Air




Particulate

Small particulate is held in the HEPA filter

Medium sized particulate held in the filter media


> Velocity drops through expansion


Large particulate settles to the bottom of the DeepPleat DUO filter box



TECHNICAL SPECIFICATION

- 1 iQ Display
- 2 On / Off Switch
- 3 Power Cable
- 4 Signal / Interface Cable
- 5 Castors
- 6 Door Hinge
- 7 Hose Inlet Connection 125mm
- 8 Exhaust Outlet
- 9 Motor Cooling Inlet
- 10 Door Latch
- 11 Motor Cooling Outlet
- 12 Standby Button



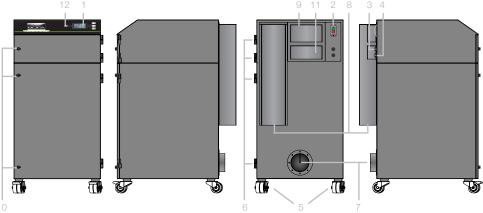





Tel: +44 (0) 1202 699 444 Fax: +44 (0) 1202 699 446 Email: sales@bofa.co.uk Web: www.bofa.co.uk

















